

OSCULATI



**BLACK LINE
2025**



Sail in a sea of accessories



Extensive documentation

14,000 downloadable files (interactive 3D models, instructions, certificates and technical specifications)



Excel-compatible

Copy/paste your orders from Excel and export your cart in a click



Replacement Items

Is an item discontinued? We suggest the optimal alternative for your needs



Best price

We always suggest the recommended quantity at the lowest price



Price lists

Check your reserved price list in real time



Your history

Check your order history at all times, online and offline



Online support

Contact our WhatsApp support service for advice and solutions



"Do it yourself" RMA

Select purchased items and compose your return order



Outlet

Discover thousands of items at discounted prices up to 40%

Windlass accessories

Rock deck footswitch for windlass/ winch electrical control.

AISI 316

Operated by foot or manually.
Fitted with a rotation release system for recess mounting in order to save space.
Ideal to activate the contactors, perfectly watertight, stainless steel outer ring.

OSCOLATI

Code	Button colour	Ø mm
02.345.00	Black	70



Contact Confirmed — 11.152.11-12

The Wireless Light Rod has landed



Wireless | ABYC-C5 | LED | Carbon | IP67

360° mooring light, poles and combined pole lights < 20 m, RINA and NMMA type-approved

Light rod with removable wireless base



WIRELESS **ABYC-C5** **LED** **CARBON** **IP67**

Removable 360° white light rod with 2NM visibility.

It features a special mounting base that allows operation via a wireless contact, prevents exposed metal contacts and ensures completely watertight seal.

The rod is fixed to the base with a sturdy bayonet fitting. Once stowed, only a small flat disc for attachment is visible on the hull.

Code	Length cm	Light colour	Base	Rod	V
11.152.11	60	Black plastic	Black plastic	Carbon	12
11.152.12	100	Black plastic	Black plastic	Carbon	12

 **11.152.90** - Additional or replacement wireless base




Evolo Smart 360° mooring light



LED For vessels < 20 m.

Code	Body material	Body colour	V	W
11.039.13	Plastic	Black	12	2




Evolo 360° mooring light with light source



LED For hulls < 20 m, certified COLREG72 and ABYC-C5.
100-mm overall height.

ABYC-C5

Code	Body material	Body colour	V	W
11.039.17	Plastic	Black	12	2

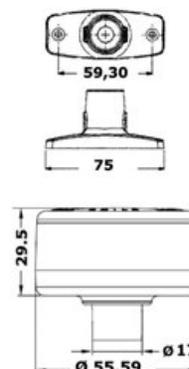

Sphera Design navigation lights up to 12 m. RINA type-tested.


OSCULATI



Compact 12 navigation lights

COLREG72 type-tested.

Type	Body	Torpedo bulb included	V	W
	black			
112.5° left	11.408.01	14.400.00	12	10
112.5° right	11.408.02	14.400.00	12	10
225° bow	11.408.03	14.400.00	12	10
135° stern	11.408.04	14.400.00	12	10

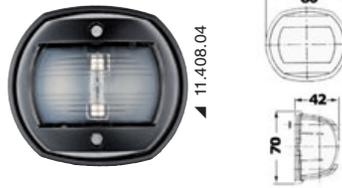

OSCULATI



Compact 12 LED navigation lights

LED COLREG72 type-tested.

Type	Body	LED bulb included	V	W
	black			
112.5° left	11.448.01	14.300.40	12	0.8
112.5° right	11.448.02	14.300.41	12	0.8
135° stern	11.448.04	14.300.41	12	0.8




OSCULATI



Classic 12 navigation lights

COLREG72 type-tested for vessels up to 12-m long.

Type	Body	Torpedo bulb included	V	W
	black			
112.5° left	11.410.01	14.300.00	12	10
112.5° right	11.410.02	14.300.00	12	10
225° bow	11.410.03	14.300.00	12	10
135° stern	11.410.04	14.300.00	12	10



Sphera Design navigation lights up to 20 m. RINA type-tested.

OSCULATI



Classic 20 LED navigation lights

LED COLREG72-certified for vessels up to 20-m long.

Type	Body	Bulb included	V	W
	black			
112.5° left	11.440.01	14.300.50	12	0.8
112.5° right	11.440.02	14.300.51	12	0.8
225° bow	11.440.03	14.300.52	12	0.8
135° stern	11.440.04	14.300.51	12	0.8




Sphera Design navigation lights up to 20 m. RINA type-tested.

Maxi 20 navigation lights



COLREG72-certified for vessels up to 20-m long.

Type	Black casing 12 V	Black casing 24 V	Halogen bulb included 12 V 15 W	Halogen bulb included 24 V 15 W	Optional 12 V LED bulb
112.5° left	11.411.01	11.411.21	14.202.12	14.202.24	14.301.24
112.5° right	11.411.02	11.411.22	14.202.12	14.202.24	-
225° bow	11.411.03	11.411.23	14.202.12	14.202.24	-
135° stern	11.411.04	11.411.24	14.202.12	14.202.24	-



Discovery navigation lights up to 20 m

Discovery navigation lights



LED

COLREG72-certified for vessels up to 20-m long.

Code	Type	V	W	Visibility N.M
11.477.01	112.5° left	12/24	1	2
11.477.02	112.5° right	12/24	1	2
11.477.04	135° stern	12/24	1	2
11.477.05	112.5° left + 112.5° right	12/24	1	2
11.477.07	360° masthead	12/24	1.8	2
11.477.08	360° masthead + three colors	12/24	4.8	2

Discovery navigation lights

The ideal range of lights for your boat, robust and elegant design.



Equipped with LED lights for a long service life and easily installed on different deck and mast surfaces.



EVOLED navigation lights with low-consumption LED light source



LED

ABYC-C5

For vessels up to 20 m, certified COLREG72 and ABYC-C5.

Type	Black polycarbonate body	V	W
112.5° left + 112.5° right	11.039.02	12	1



Lights up to 20 m, RINA type-tested

OSCULATI




Sphera II LED navigation lights up to 20 m, polycarbonate body

LED

Certified COLREG72 and ABYC-C5, for vessels up to 20 m. Completely watertight.

Type	Body	V	W
	black		
112.5° left	11.060.01	12/24	0.6
112.5° right	11.060.02	12/24	0.7
Twocolor 112.5° + 112.5°	11.060.05	12/24	2
Bow 225°	11.060.03	12/24	2
Stern 135°	11.060.04	12/24	2



OSCULATI



Sphera IV LED navigation lights up to 20 m, polycarbonate body

LED


IP67

USCG ABYC-C5 - CE EN 60945



Housing with UV-resistant polycarbonate lenses.

Code	Type	Body	V	W	Visibility miles
11.063.01	360° masthead	black	12/24	0.5	2
11.065.01	360° masthead + tricolor (only for sailing vessels)	black	12/24	0.5+2.6	2



Metal walkway and courtesy lights



13.182.11

Ultra-compact LED courtesy lights, minimalist look - downwards

IP67

Front and back waterproof model. Complete with rear cable gland, 1m-cable and waterproof micro connector. Light orientation downwards. Recess hole diameter 17 mm. Body material: matt black anodized aluminum.

Code	V	W	K	Light colour	Hole Ø	←→ mm
13.182.10	12	1	6000	white	17	Ø26x36
13.182.11	12	1	-	blue	17	Ø26x36




Metal reading/chart lights

Articulated LED spotlight

Complete with USB-C port, 2 A.
Touch ON-OFF switch with night light and dimmer to adjust light intensity.


Code	Finishing	V	W	Switch	Dimmer	material	lumen	K
13.867.31	Black	12	2	Yes	Yes	Black aluminium	270	3200



Articulated LED spotlight

Complete with USB-C port, 2 A.
Touch ON-OFF switch with night light and dimmer to adjust light intensity.
Material: black aluminium.


Code	Finishing	V	W	Switch	Dimmer	lumen	K	Length mm
13.867.36	Black	12	2	Yes	Yes	280	3000	220
13.867.46	Black	12	2	Yes	Yes	280	3000	400



LED spotlight

Complete with USB-C port, 2 A.
Touch ON-OFF switch with night light and dimmer to adjust light intensity.
Material: aluminium with stainless steel satin finish.

Code	Finishing	V	W	Switch	Dimmer	lumen	K
13.867.39	Black	12	2	Yes	Yes	280	3000




Plastic reading/chart lights

LED spotlight

ABS.


Code	Finishing	V	W	Switch	lumen	K	LED beam angle	No of LEDs	Light colour
13.517.00	black	12/24	2	Yes	50	2900-3200	90°	16 LED G4	white



LED spotlight

Made of ABS with chromed brass articulation. Rotation: 300°. Up/down: 90°.

Code	Finishing	V	W	Switch	lumen	K	LED beam angle	No of LEDs	Light colour
13.896.02	black	12/24	1.32	Yes	150	3500	40°	1 HD LED	white



OSCOLATI



13.896.02


Articulated spotlights



Articulated reading LED spotlight

Mirror-polished stainless steel baseplate and chromed brass head.

Code	Arm finish	V	W	Switch	lu-men	K	LED beam angle	Light colour	←→ mm	
									Base	arm
13.237.05	Coated in black leather	12/24	3	Yes	79	3000	40°	white	66x45	220

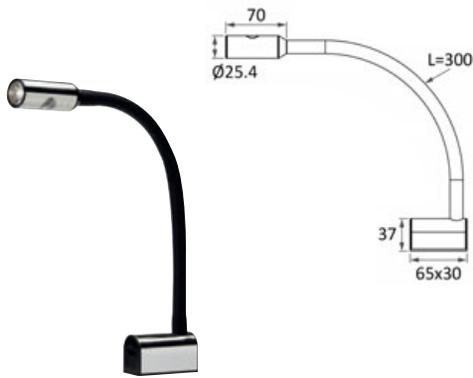


Articulated reading LED spotlight

IP40

Polished stainless steel spotlight and baseplate. articulated arm coated in black silicone. Fitted with USB socket on the base. Touch switch on the head.

Code	Finish-ing	V	W	Switch	lu-men	K	LED beam angle	No of LEDs	Light colour	←→ mm	
										Base	arm
13.237.07	Black silicone	12/28	3	Yes	167	3000	50°	1	white	65x37	300

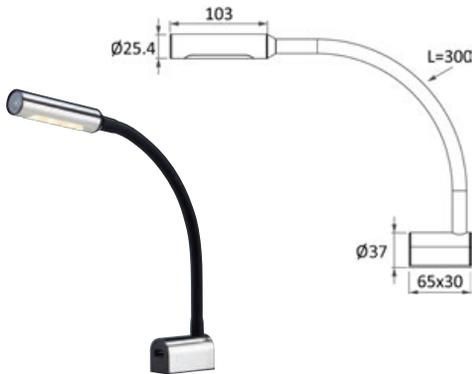

Articulated reading LED spotlight

Polished stainless steel spotlight and baseplate. Articulated arm coated in black silicone. Fitted with 2.1A USB socket on the base. Touch switch on the head. Powerful light beam with 3 x white LEDs + 2 x red LED for night light.


Code	Finish-ing	V	W	Switch	lu-men	K	LED beam angle	No of LEDs	Light colour	←→ mm	
										Base	Arm
13.237.08	SS + black silicone	12/24	4.5 + 1.0	Touch	430	3000	50°	3+2	White + Red	65x37	300



Articulated reading LED spotlight

Flexible metal arm and tiltable lamp. Switches from white to red light with a simple touch.

Code	Finishing	V	W	Switch	lumen	No of LEDs	Arm mm	Light colour
13.239.24	Black	12	1.3	Yes	70	6 SMD LEDs	330	White + night red

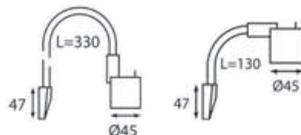


Spot light for cockpits, decks and cross-tree

UTILITY navigation light and deck light for hulls up to 12 m

225° navigation light Art. 11.415.03 compliant with **IMCO and RINA** standards. Paired with special 35 W 12 V **halogen spotlight with dichroic front glass** (replacement bulb 13.258.57). Made entirely of black polycarbonate, perfectly watertight. Special flexible system of side straps allowing use on masts of **any size**. Mount the RINA **approved** light 11.415.03 (replacement bulb 14.300.00).

Code	Version	Body	V	W	W equivalent	mm	Spare bulb
13.243.86	Halogen dichroic spot light	Black polycarbonate	12	35	-	175x135	14.258.57 12 V
13.243.87	HD LED	Black polycarbonate	12	4	48	175x135	14.258.56 LED




Navigation and deck LED light for boat up to 20 m



225° LED navigation lights 11.060.03 + deck LED light. Technopolymer body with flexible wings that match any kind of mast. Certificates EN60945 - COLREG 1972 + USCG + ABYC A-16.


Code	Light	Deck light	Body	V
13.243.88	11.060.03	4x1W HD LEDs	Black technopolymer	9-33



Adjustable 6x3W HD LED light for A-frame

IP67 Black coated aluminium body, stainless steel bracket.

Code	V	W	K	Beam type	HD LED	mm	OPTIONAL base plate	
							flat mounting	22/25-mm Ø pulpit
13.321.01	10/30	18	6000	SPOT	6x3 W	Ø 115x64	13.240.80	13.239.80



14.416-432.XX

Tailored to your needs.

16/32A | IP67 | IEC 60309-5



Sockets, plugs and cables

Cruiser 16A socket and plug




16A

IP67

IEC 60309-5

Marine plug and socket for 16A - 230V shore power cord. Made of PA6, fitted with high energy efficiency contacts and IP67 cover. Plug designed for ergonomic grip, fastened to the boat socket through a rotating bezel. IP67 watertight closure. A rubber cap ensures IP44 tightness when unplugged. Simple and compact design for easy installation in any corner of the cockpit. In compliance with the IEC 60309-5 European safety standards.

Code	Description	Plastic color	Lid material	IP
14.416.21	Socket	Black	Stainless steel	IP67
14.416.40	Socket	Black	Nylon Pa6	IP67



Cruiser 32A plug and socket




32A

IP67

IEC 60309-5

Nautical socket and plug for 32A - 220V shore power cable. Made of PA6, equipped with high energy efficiency contacts and an IP67 closure cap. The plug is designed to ensure an ergonomic grip, and the rotating ring allows it to be securely fastened to the boat's socket with an IP67 watertight seal, while the rubber cap ensures an IP44 seal when not connected. The clean design and compact dimensions allow for convenient installation of the socket anywhere in the cockpit. Compliant with European safety standards IEC 60309-5.

Code	Description	Plastic color	Lid material	IP
14.432.40	Socket	Black	Nylon Pa6	IP67

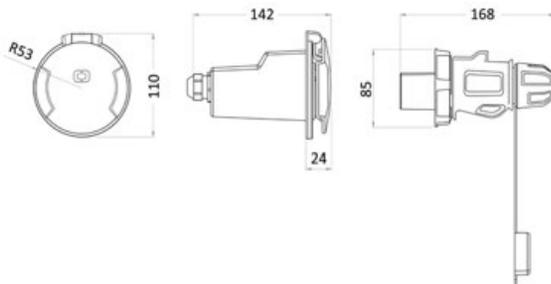

Complete set for 220V 16A system

16A

IP67

IEC 60309-5

NO TOOL

Complete 220V boat power supply set for dock charging column. The kit includes Cruiser electrical socket for boat installation, 16A wired electrical panel with **magnetohermic circuit breaker**, Schuko socket, 3m 3G wiring and a 10m cable for charging column connection. The system is available in four different layouts to choose the socket that best suits the hull color.

Code	Boat socket		16A Panel	Power cable
	Plastic color	Lid material		
14.416.70	black	Nylon Pa6	14.737.16	14.416.20
14.416.80	black	Stainless steel	14.737.16	14.416.20



Shower with hot/cold water built-in mixer — 15.470.XX

SATURN

no more chills, just chill out



New
BLACK BASE

 **Cold water only**
Code 15.471.xx

Discover more!




Showers and deck showers

New Edge deck shower with Boris shower head

Plastic shower head with chromed head, UV-resistant ASA housing.

Black door with black compartment RETAIL (1 pc)	mm		Pipe in	Hose m
	recess	outer dimensions		
15.248.56	Ø70x40.5	88x95	Net PVC	2.5
15.248.57	Ø70x40.5	88x95	Net PVC	4



OSCULATI



Saturn shower with integrated hot/cold water mixer

REGISTERED DESIGN / DISEGNO DEPOSITATO

HOT & COLD

Shower with built-in mixer. Flat hidden design. Horizontal or vertical mounting. Shower housing fitted with anti-vibration washer. Hot and cold water setting through rotation of the shower body. Water flow regulation by a push lock button that allows to block the water jet and avoid waste. **Built-in mixer for precise temperature setting and maintaining between openings.**





Video

OSCULATI



Code	Mounting	Base material	Base color	Type of fastening	Minimum internal space	Flange diameter	Hose m	OPTIONAL carbon fiber shower rod
15.470.04	Horizontal	ABS plastic	Black	Locknut	230	84	4	15.480.29
15.470.14	Vertical	ABS plastic	Black	Bonding	160	120	4	15.480.29

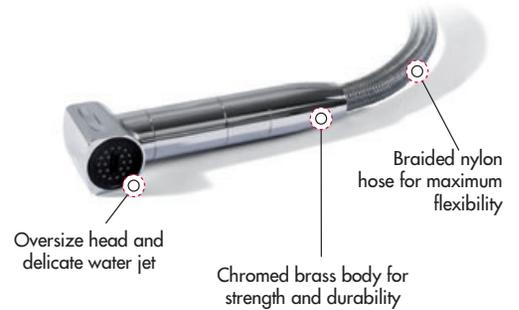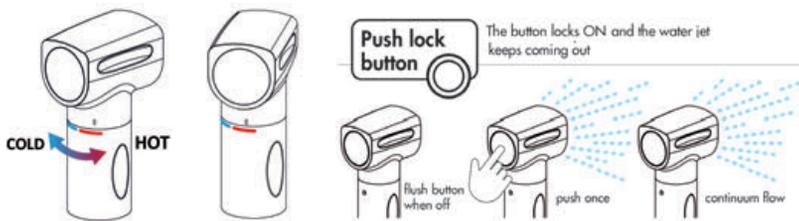

Saturn cold-water shower

REGISTERED DESIGN / DISEGNO DEPOSITATO

ONLY COLD

Flat hidden design. Horizontal or vertical mounting. Shower housing fitted with anti-vibration washer. The flow is adjusted by touching a push lock button that blocks the water jet and prevents waste.

OSCULATI



Code	Mounting	Base material	Base color	Type of fastening	Minimum internal space	Flange diameter	Hose m	OPTIONAL carbon fiber shower rod
15.471.04	Horizontal	ABS plastic	Black	Locknut	230	84	4	15.480.29
15.471.14	Vertical	ABS plastic	Black	Bonding	160	120	4	15.480.29




OSCULATI

Rocky shower telescopic rod for outdoor purposes

This rod makes it possible to have a shower head on the stern gangplank. Made of black anodized aluminum + stainless steel accessories. Allows the shower to be oriented in all directions and heights. Lightweight and telescopic for easy storage, rod outer diameter 35 mm (order 34.355.00 for bulkhead stowage). Ideal to match Adriana deck shower 15.480.00 or Keji II Continuum Flow 15.237.06.

Code	Version	For showers	Type	Description
15.480.21	Without lid	-	Standard Base	Recessed stainless steel + POM bushing
15.480.26	With lid	-	Delux Base	Flush with sliding cover, POM bushing and countersunk screws
15.480.20	Aluminium	Generic	Rod	Universal shower rod in black anodized aluminium
15.480.28	Carbon	Generic	Rod	Universal carbon shower rod
15.480.29	Carbon	Saturn type 15.470.xx	Rod	Carbon shower rod only for Saturn shower 15.470.xx

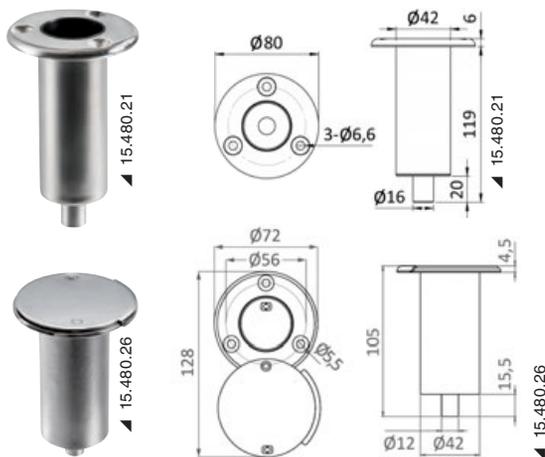


Swivelling and foldable taps

OSCULATI

Style Series Black Tap

Series of foldable mixers with black chroming. Unlike simple painting, chrome plating ensures extreme quality and resistance to impacts and/or scratches. They can be mounted inside the sink to have a completely smooth surface.

Code	Function	Cartridge
17.076.20	Cold water	Ceramic
17.076.22	Hot + cold water	Ceramic
17.079.05	Hot + cold water	Ceramic

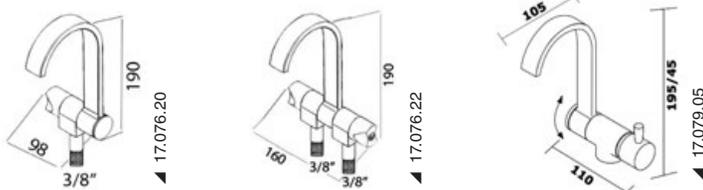

Flush inspection hatch — 20.29x.xx

Seamless Access, Unmatched Durability

100% flush hinges | 180° opening | UV BASF resistant



Hatches, housings and lockers type-tested in compliance with Directive 2013/53/UE



FLUSH inspection hatch CE

The faired cover hides the frame completely. 100% flush hinges. **180° opening**. Walking surface. UV BASF resistant. It can be installed on any sports craft, boat design category A, B, C, and D, area II a, III, IV, watertightness degree 2.

Black	Outside mm	Inside mm	Cut size mm	Optional immediate installation lock kit
20.291.50	380x280	295x198	310x210	20.093.00
20.292.50	600x350	513x265	530x280	20.093.00
20.293.50	375x375	285x285	300x300	20.093.00
20.294.50	520x465	430x375	445x390	20.093.00
20.295.50	600x250	515x165	530x180	20.093.00

CE APPROVED
based on
UNI EN ISO 12216:2004



Inspection hatch with removable front lid

Very sturdy anti-skid surface; **splash-proof** lid closure with neoprene seal; flush mounting; they can be used as hatches for lockers, fishing containers or as boxroom hatches or bayonet front bulkheads; removable front for easy access. Ideal for installation on dashboard with nearby steering bench.

Black	Outside mm	Inside mm
20.302.23	305 x 355	225 x 275
20.302.33	375 x 375	295 x 295



Storage pocket

White ABS frame with braided nylon net. Back **self-adhesive**, or to be fixed with **4 screws**.

Black	mm	Prepared for mounting on hatches
48.434.20	250x115x10 (LxHxP)	20.291.00; 20.293.00; 20.303.00; 20.305.00; 20.305.40
48.434.21	250x115x30 (LxHxP)	-



Inspection hatches, type-tested in compliance with Directive 2013/53/UE

Inspection hatch with cover, CE approved

Antiskid **watertight** surface, recess hole with swivelling hollow flat.
It can be installed on any sports craft, boat design category A, B, C, and D, area II a, III, IV, watertightness degree 2.

Black	Max external Ø mm	Passage mm	Recess Ø mm	hole spacing mm
20.840.50	265	190	215	242
20.844.50	315	240	270	290

CE APPROVED
based on
UNI EN ISO 12216:2004

OSCULATI



Polypropylene inspection hatches, fitted with hidden mounting screws

Screw-locking, 100% watertight, equipped with rubber O-RING

Black	External Ø mm	Ø opening mm
20.199.11	160	102
20.199.12	182	127
20.199.13	220	152



Stylish and practical EC type-approved inspection hatch.

Screw turning lock, 100% watertight, fitted with rubber O-RING.

In polypropylene	External Ø mm	Ø opening mm
Black		
20.204.20	147	102
20.206.20	172	125
20.205.20	205	152
20.207.20	260	203

CE APPROVED
based on
UNI EN ISO 12216:2004



Polypropylene inspection hatch, fitted with rotating lock and bayonet

100% flush. The lid also covers the screws.

black	External Ø mm	Inside Ø mm
20.337.01NE	135	100
20.337.02NE	204	155



Compartments and deck fillers

Flush-mount plastic compartment for fuel plug housing

Made of hydrocarbon-resistant nylon

Code	Recess mm	Inner size mm	Frame mm	Colour
20.899.50	110x155	78	182x136	Black



Black nylon deck fillers


Code	Type	Neck Ø mm	Ø Cap mm	Neck length mm
20.868.02	WATER	38	89	65
20.868.03	Diesel	50	89	65
20.868.04	FUEL	38	89	65
20.868.05	WASTE	38	89	65

OSCULATI



FM radio/Bluetooth/USB/MP3

OSCULATI



Bluetooth dashboard amplifier

BLUETOOTH WATERPROOF IP66

Amplifier with controls on the dashboard. It receives the music signal from any Bluetooth device (Smartphone, Tablet, etc.).
 Input: Bluetooth, AUX and USB (AUX and USB at the rear of the amplifier).
 Water-resistant and ideal for installation on the dashboard.
 Separate output and controls for subwoofer.
 Power: 4x45W.
 Voltage: 12V.
 Central knob for easy volume setting.


Code	Description	V
29.531.00	Bluetooth dashboard amplifier	12



OSCULATI



29.530.02



29.530.02

Radio for instrument panel with remote control and DAB antenna

DAB VERSION SPLASHPROOF

- Compatible devices: Bluetooth/USB/MP3/FM/DAB.
- Display: 3" colour screen, video line in/out.
- Also for external installation
- Input: Bluetooth, USB, 1 x RCA stereo pair.
- Power: 4x40 W.
- Backup memory.
- 12V voltage.
- Accessories: DAB antenna, remote control.
- total cable length: 2 m

Code	Description
29.530.02	Dashboard radio with accessories
29.530.08	Additional USB-AUX cord with watertight front panel. To be used for listening to music on external USB memories.



29.530.08



29.530.02



Radio for instrument panel

29.530.02-08 with remote control and DAB antenna



- Bluetooth
- Splashproof
- Memoria di backup
- 12 V
- 4x 40 W

DAB version | Splashproof

Boating stereo speakers

Turn up the volume!

With LED Color radio and speakers

29.747.02-04 Discover the entire range for your onboard music!



Waterproof | UV resistant | LED RGB

Pair of two-way speakers with programmable multicolor LEDs

WATERPROOF


UV RESISTANT

LED RGB

2-way loudspeakers with RGB multicolour LED lights programmable by means of the included radio remote control. 2-way loudspeakers offer better bass performance. ABS case and polypropylene diaphragm.

Code	Colour	Power W		Response frequency Hz	Sensitivity dB	←→ mm			
		Rms	Max			D	d1	H	h
29.747.02	Black	30x2	80x2	80-20000	90	166	121	83	57
29.747.04	Black	50x2	120x2	60-20000	91	192	138	98	65

OSCULATI





Pair of dual cone speakers

WATERPROOF

UV RESISTANT

With ABS casing and polypropylene cone.

Code	Colour	Type	Power W		Response frequency Hz	Sensitivity Db	Minimum compass distance m	←→ mm			
			RMS	MAX				D	d	H	h
29.741.02	Black	3"	20x2	40x2	100-20000	90	0.80	104	73	53.5	38.5
29.741.04	Black	4"	30x2	60x2	60-20000	90	0.80	129	94	70	53.5
29.741.06	Black	5.25"	40x2	80x2	50-20000	90	0.80	157	124	75	53.5
29.741.08	Black	6.5"	60x2	120x2	50-20000	91	1.40	180	150	82	61



Dual cone stereo speaker pair


WATERPROOF

UV RESISTANT

With ABS casing and polypropylene cone.



Code	Colour	Type	Power W		Response frequency Hz	Sensitivity Db	Minimum compass distance m	←→ mm			
			RMS	MAX				D	d	H	h
29.743.02	Black	5.25"	2x40	2x80	80-20000	90	1.00	166	121	83	57
29.743.04	Black	6.5"	2x60	2x120	60-20000	91	1.40	192	138	98	65
29.743.06	Black	8.0"	2x90	2x180	40-20000	91	1.40	232	184	124	89



Pair of ultra-flat stereo speakers with dual cone


WATERPROOF

UV RESISTANT

ABS case, polypropylene cone. Ultra-flat version for **minimum recess**.



Code	Colour	Type	Power W		Response frequency Hz	Sensitivity Db	Minimum compass distance m	←→ mm			
			RMS	MAX				D	d	H	h
29.742.02	Black	4"	10x2	20x2	90-18000	90	0.80	133	95	38	23
29.742.04	Black	5.25"	20x2	40x2	80-18000	90	0.80	162.5	119	39.5	23
29.742.06	Black	6.5"	30x2	60x2	60-18000	91	1.00	186	135	40	23.5






Pair of two-way stereo speakers, Slim version, depth 23 mm

WATERPROOF Two-way system (for better performance to lows and highs) with separate tweeter. For indoor and outdoor use. Min. distance from the compass: 1 m.

Code	Colour	Ø A mm	Ø B mm	C mm	Power W (torque)		Frequency Hz
					Rms	Max	
29.721.98	Black	150	120	23*	40	60	60 - 18000

* Designed for installation with little recess depth




Subwoofer

WATERPROOF **UV RESISTANT**

With ABS casing and polypropylene cone.


Code	Type	Colour	Power W		Response frequency Hz	Sensitivity Db	Minimum compass distance m	mm			
			Rms	Max				D	d	H	h
29.744.02	8"	Black	100	200	40 - 10000	90	1.40	254	187	122	90

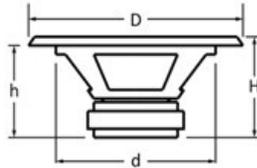

Pair of two-way stereo speakers for indoors

Recessless adjustable bracket mounting.

Code	Type	Colour	Power W		Response frequency Hz	Sensitivity dB	mm AxBxC
			Rms	Max			
29.746.02	3"	Black	40x2	80x2	100-20000	90	149x96x95
29.746.04	4"	Black	60x2	120x2	80-20000	90	206x140x120




Pair of 2-way stereo speakers CABINET series for outdoor/ indoor

LOW MAGNETIC **WATERPROOF IP65**

Low magnetic impedance (to prevent compass/instrument interference), 2-Way coaxial with high acoustic quality. Supplied with stainless steel coated adjustable bracket

Code	Colour	Power W (torque)		Frequency Hz	Sensitivity
		Rms	Max		
29.730.11	Black	20+20	40+40	75-20000	90 ± 2 dB 1watt/1m

Bluetooth compatible (with amplifier 29.749.0x)

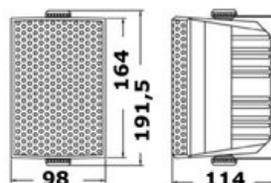




FINDER 2" (50 mm) and 2" 5/8 (67 mm) compasses

Finder 2" and 2" 5/8 compasses



ABS body, equipped with lighting, compensators and red lubber's line. Also suitable for high speed. Card graduated in 5° intervals. Cardan with 30° max slope.

Code	Rose colour	Ø apparent rose mm	Body colour	Version	Light	LED Lighting 12V	Compensators	Maximum tilt
25.170.01	black	50 (2")	black	with bracket	Yes	Yes	Yes	15°
25.171.01	black	67 (2" 5/8)	black	with bracket	Yes	Yes	Yes	30°
25.172.01	black	67 (2" 5/8)	black	flat	Yes	Yes	no	30°

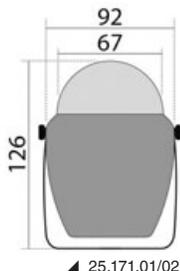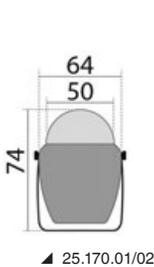


Fenders



Inflatable fender with double eye

Fitted with inflating valve. Excellent value for money.

Model	Colour	Ø cm	←→ cm	kg
	black			
NDH-0	33.403.00	10	34	0.3
NDH-1	33.403.01	11	46	0.4
NDH-2	33.403.02	13	53	0.7
NDH-3	33.403.03	16	61	1



Flat fenders

In soft closed-cell foam PVC, with an outer coating of coated and welded PVC fabric. They can be folded for easier storage.

Colour	←→ cm	Thickness cm
black		
33.515.11	61 x 16.5	6.4
33.515.12	87 x 16.5	10



Fender Series OG

Manufactured from high-quality soft PVC. Equipped with an inflation valve.

Model	Colour	∅		←→		kg	PACKAGE
	black	cm	in	cm	in		
OG2	33.539.12	11	4 1/2	40	16	0.50	10
OG3	33.539.13	14	5 1/2	50	20	0.85	6
OG4	33.539.14	16	6 1/2	58	23	1.1	4
OG5	33.539.15	21	8 1/2	68	27	2	4

Fender covers

Extra soft fender cover

Cut-to-size head and bottom adjustable by means of strap and cam cleat. Made of soft texturized and elastic polyester fibre with anti-abrasion weaving. They cover the fenders perfectly, are UV-resistant and washable.

For Polyform model	Black	for fenders ±10% mm	
			
F1-G4-NF4	33.481.01	150	640
F02	33.481.09	190	660
F2-HTM2	33.481.02	220	640
F3-G5-NF5	33.481.03	220	760
F4	33.481.04	220	1040
F5-G6	33.481.05	300	760
F6	33.481.06	300	1090
F7	33.481.07	380	1040
A2	33.481.16	390	490
A3	33.481.17	470	590
A4	33.481.18	550	710
A5	33.481.19	700	920
A6	33.481.20	860	1180
HTM3	33.481.14	254	660

OSCULATI



Neoprene fender covers

Fender covers made of closed-cell neoprene with a thickness of 3 mm. Extremely resistant, non-absorbent and reversible. The material also provides high UV protection and prevents fading. They can be used in both directions (inside/outside) as they are finished in the same way to allow for dual color choice (double face).

Code	Model	Colour	Ø mm
33.470.01	F1	 Blue/Black	150
33.470.02	F2	 Blue/Black	220
33.470.12	F02	 Blue/Black	190
33.470.03	F3	 Blue/Black	220
33.470.04	F4	 Blue/Black	220
33.470.05	F5	 Blue/Black	300
33.471.01	A1	 Blue/Black	290
33.471.02	A2	 Blue/Black	390
33.471.03	A3	 Blue/Black	470
33.471.04	A4	 Blue/Black	550



Diver and racing buoys

Pneumatic fender

Manufactured with high-strength fabric used for inflatable boats. Complete with inflation/deflation valve and stainless steel rings on both sides for attachment. Pneumatic fenders are extremely lightweight, take up no space when deflated, and are the ideal solution for sailing and racing hulls; large vessels; emergency aid to classic fenders. For longer durability, it is recommended to pair it with a fender cover, in a color of choice.

Fender	Length cm	Ø cm	Colour	Synthetic fiber fender cover
				Black
33.529.01	70	30	 grey	33.532.01
33.529.03	110	30	 grey	33.532.03
33.529.05	100	45	 grey	33.532.05
33.529.07	170	45	 grey	33.532.07
33.529.09	182	60	 grey	33.532.09



OSCULATI



Eclipse flush latch — 38.161.6x/7x

Efficient flush latch with flush design

Black line | Compression system | Extra large handle



Lift and turn latches

Eclipse LIFT & TURN flush latch (with compression closure) - SMALL


COMPRESSION SYSTEM

EXTRA LARGE HANDLE


Featuring a very comfortable grip, it offers all the best characteristics in a single flush deck design model.

- 316 mirror-polished stainless steel;
- flush aesthetics;
- large ergonomic handle;
- Handle can be lowered every 90°.
- Foldable handle every 90°;
- visual indicator open/closed;
- ergonomic nut for easy calibration and allowing for emergency exit;
- straight cam suitable for sliding door closure;
- cam with two possible positions;
- plastic spacer with invitations for custom cutting.

Black SS version	Lock	External Ø mm	Bore Ø mm	Bulkhead thickness mm	Stop stroke mm
38.161.61	no	60	50	3-26	22-94
38.161.62	Yes	60	50	3-26	22-94



▲ Angled cam included



▲ Universal straight cam included



Eclipse LIFT & TURN flush latch (with compression closure) - MEDIUM


COMPRESSION SYSTEM

EXTRA LARGE HANDLE


Featuring a very comfortable grip, it offers all the best characteristics in a single flush deck design model.

- 316 mirror-polished stainless steel;
- flush aesthetics;
- large ergonomic handle;
- Handle can be lowered every 90°.
- Foldable handle every 90°;
- visual indicator open/closed;
- ergonomic nut for easy calibration and allowing for emergency exit;
- Straight cam suitable for sliding doors and having two different positions.
- plastic spacer with invitations for custom cutting.

Black SS version	Lock	External Ø mm	Bore Ø mm	Bulkhead thickness mm	Stop stroke mm	Kit
38.161.71	no	75	60	5-36	30-101	no
38.161.72	Yes	75	60	5-36	30-101	no



▲ Angled cam included



▲ Universal straight cam included




Push to close latches

Plastic flush pull latches

Made of **white nylon**, fitted with **stainless steel** lock stopper and two 2 mm stoppers.

Code	Version	Colour	Recess Ø mm	External Ø mm	Inner size mm	Accepts thicknesses mm
38.147.01	without lock	Black	49.6	61.4	38.8	from 7 to 18
38.147.21	With lock	Black	49.6	61.4	38.8	from 7 to 18

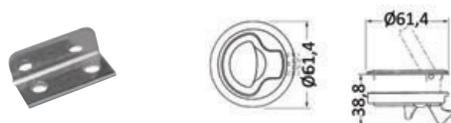

U-bolts



Rapid Lock system — 39.840.xx

**Fasten.
Release.
Relax.**

Quick Release | AISI316 | Flush Design | Dyneema ring



Rapid Lock system for fenders and bimini tops


AISI 316

FLUSH

Quick coupling/release system for fast fastening of fenders, Bimini tops, etc. Made of AISI316 stainless steel. When not in use, the recess base is flush with the surface. Fitted with Dyneema ring for fastening to the fender/Bimini top.



Black SS version	Description	mm
39.840.60	Base Rapid Lock	Ø 33x53 h
39.840.61	Removable part	Ø 39x30 h
39.840.10	Loop ring grey Dyneema	Ø 7

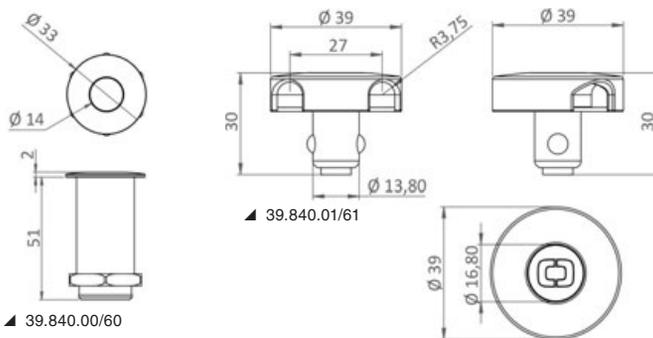


AISI316 stainless steel cleats



Bull Dog cleat - Black line

AISI 316 Made of polished stainless steel with a surface coating that integrates a black layer in the steel cleat whose surface becomes extremely hard and corrosion-resistant.


Code	A mm	B mm	C mm	D mm	E mm	Stud Ø mm	Recommended studs
40.131.56	158	35	74	53	49	8	40.142.09
40.131.57	205	44	94	64	62	10	40.142.11

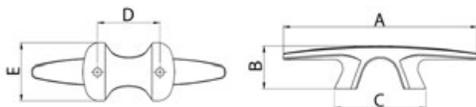


Nordik cleat - Black Line

AISI 316 Made of stainless steel with a surface coating that integrates a black layer in the steel cleat whose surface becomes extremely hard and corrosion-resistant.

Code	A mm	B mm	C mm	D mm	E mm	Stud Ø mm
40.137.51	150	45	90	47	30	8
40.137.52	205	55	120	69	35	10
40.137.53	265	70	150	83	40	12

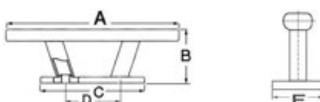



Black Aero cleat

Black anodized aluminium. Fitted with studs (T).

Code	L mm	H mm	E mm	T	T2
40.102.15	158	35	45	M10x70	50
40.102.20	208	38	60	M10x70	50
40.102.25	258	45	68	M12x75	50
40.102.30	308	51	78	M14x80	50

Stainless steel pop-up cleats



Ghost II hidden cleat

AISI 316 **PERFECT GRIP** **SMOOTH MOVEMENT**

Watertight cleat with mounting screws from above. Very smooth operation. Ergonomic lifting handle. Fluorinated rubber O-ring for smooth sliding. ENAVE approved in compliance with ISO 15084:2003.

Black SS version	A mm	B mm	C mm	D mm	E mm	F mm	ØH mm	ØG mm	Workload Kg	Fixing	OPTIONAL drainage conduit
40.156.16	160	38	15	28	47	48	14	24	800	3 x M6 screws	40.155.72
40.156.24	240	52	20	44	70	72	18	32	2050	3 x M8 screws	40.155.74
40.156.31	310	68	25	56	85	93	22	41	5200	3 x M10 screws	-



Fender profiles made of stainless steel and PVC bases

Fender profiles


AISI 316

Made-in-Italy AISI316 stainless steel C-shaped fender profiles. 3-m standard length, tapered and mirror-polished. Each bar is pickled and passivated for optimum resistance in salty environment. They can be used with dedicated UV-resistant PVC base plates available in white, black and grey, and with dedicated mirror-polished AISI316 stainless steel terminals.



Code	Description	Bore type	mm			Bars m	Bore centre distance	Black PVC base	SS end cap
			A	B	H				
44.480.20	Profilo 20	flared	19	1.5	4.6	3	198	44.481.53	44.484.33
44.477.20	Profilo 20	deep-drawn	19	1.5	4.6	3	186	44.481.55	44.484.35
44.480.30	Profilo 28	flared	28	1.5	7	3	198	44.481.56	44.484.36
44.480.38	Profile 35	flared	35	1.5	9	3	198	44.481.57	44.484.37

Base in 24-m-roll

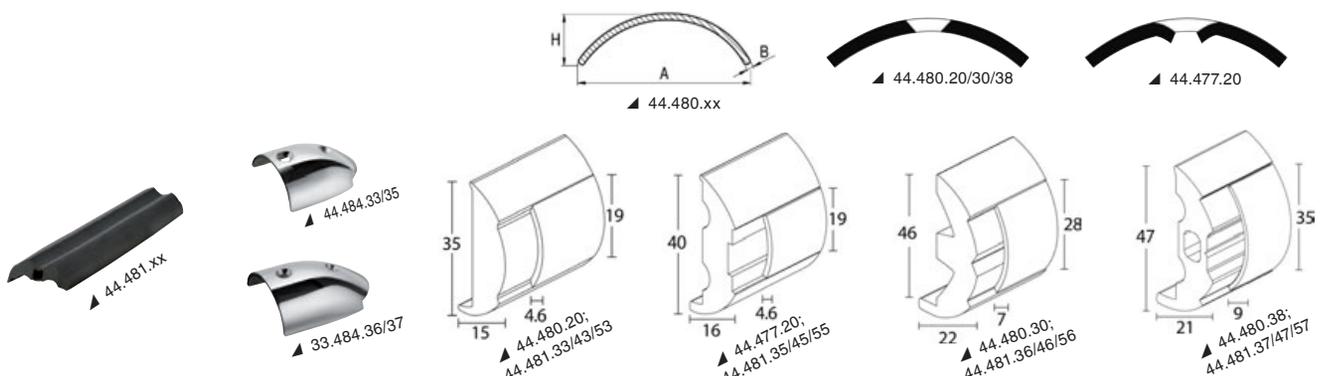

40.156.XX - Ghost II hidden cleat

Elegant design combined with the ergonomic shape

ALSI 316 | Perfect Grip | Smooth Movement



Mickey self-tensioning, modular and independent Bimini system





It can be used as sunshade or water protection and is UV-resistant. Simple to assemble, disassemble and store. It can be installed in many different ways. The 15°-inclination basis are small and can be easily in different places of the deck depending on the needs and provide a wider coverage than traditional systems. Much more convenient than the standard systems available on the market (canopy not included).

Flexible pole for Mickey system

Fiberglass pole covered in carbon fibre with AISI316L stainless steel inserts.

Code	Ø mm	Overall height A cm	Distance gained with slope B cm	Net height from flush deck C cm	Recess D cm
46.826.14	16	137	34	129	8
46.826.15	16	153.5	38	145	8
46.826.17	16	170	43	160	8
46.826.18	16	185	47	175	8

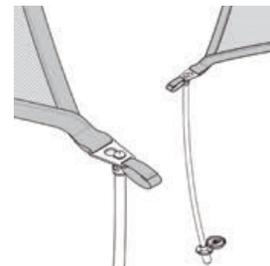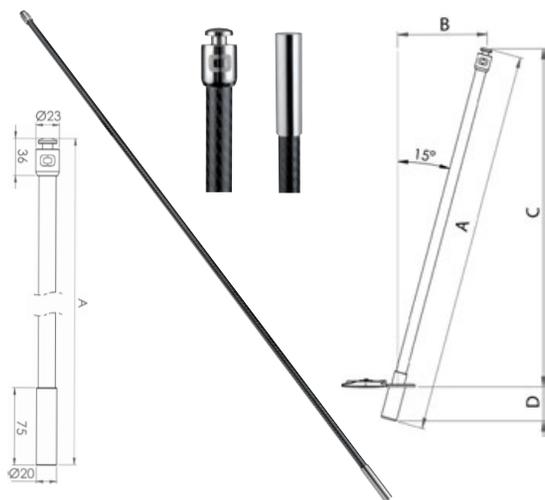

Stainless steel fastening bushing for Mickey system

Recess-fit AISI316 stainless steel bushing with fastening counter-ring. Available in 3 models.


Code	Description	Pole-Ø mm	←→ mm					min/max deck thickness F mm
			A	B	C	D	E	
46.825.00	No lid	16	52	40	54	4	26	8/40
46.825.01	Rotary lid	16	58	58	54	5	26	2/50
46.825.02	Watertight lid	16	69	62	54	10	26	2/50



Mounting base on stainless steel pulpit Mickey system

Code 46.825.10


Stainless steel AISI 316 bushing to be fixed where the pulpit crosses the support arm (to prevent bushing rotation). Adaptable to pulpits with diameters from 30 to 34 mm and support arm diameters from 25 to 28 mm. Accommodates a pulpit joint angle from 90° to 45°. Designed with a 15° angle towards the bow or stern and a 12° outward tilt of the vessel to create a self-tensioning system and maximise the size of the awning (Screws included).

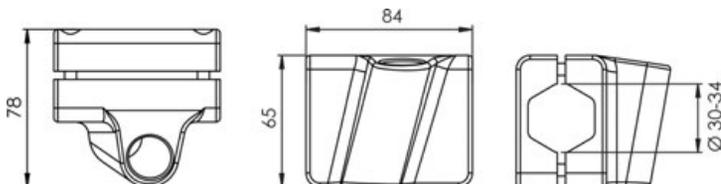

Fastening buckle for Mickey system

AISI316 stainless steel buckle for a simpler fastening of the Bimini top to the pole.

Code	←→ mm		←→ buckle for loop mm	
	A	B	1	2
46.825.09	74	50	40x5	20x3

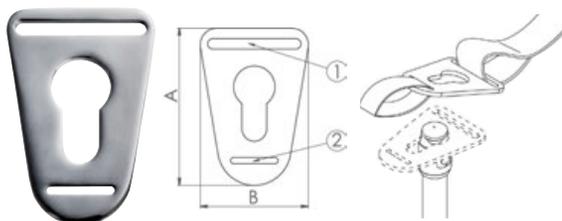

Bimini top with carbon tubes



Bimini top modular system. High finish with mirror-polished swivel-lock bushings.



Carbon pole for Bimini top

The pole rotates by 90° inside the bushing and locks. The poles are fitted with tightening bushings. Clamcleat for easy adjustment and tensioning of the Bimini top already mounted on the pole. Compatible with recess-fit bushings 46.815.xx and 46.280.xx. Fastening rope: eye spliced Dyneema rope. It can be used for direct installation on the Bimini top by means of a 10-mm Ø pawl or a snap hook. Rope not included with the pole.

Code	Ø mm	Height cm	Optional wall mounting clip
46.816.02	38	130	34.358.38
46.816.04	38	150	34.358.38
46.816.06	38	170	34.358.38
46.816.07	38	185	34.358.38
46.816.08	38	200	34.358.38
46.816.10	38	230	34.358.38
46.821.02	50	170	34.358.50
46.821.04	50	200	34.358.50
46.821.06	50	230	34.358.50

46.817.00 MARLOW spliced line, length 130 cm with 50 cm adjustment



Removable carbon pole for Bimini top

2 PCS MOUNT POLE

The pole is made up of two section and is fitted with anticorodal aluminium bushings for fast mounting. Tightening bushings and a fastening line are also supplied. The pole rotates by 90° inside the busing and locks.

Clamcleat for easy adjustment and tensioning of the Bimini top already mounted on the pole.



Compatible with recess-mount bushings 46.815.00/01, the bulkhead mount bushing kit 46.815.10 and the bulkhead mount stowage system 34.358.38.

Fastening line made of spliced Dyneema with eye. It can be used for direct fastening to the Bimini top with a 10-mm Ø ball or a shackle.

Code	Ø mm	Height cm	No of sections
46.818.09	38	90/181	2
46.818.11	38	110/231	2

46.817.00 MARLOW spliced line, length 130 cm with 50 cm adjustment

34.358.38 Bulkhead stowage system

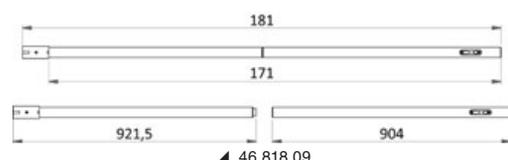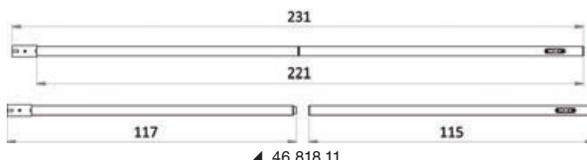


OSCULATI



Recessed bushing for carbon pole with rotating cover

In stainless steel with a 180° rotating closure. Prepared for water drainage for pipe Ø 12 mm. The closure discreetly protects the glass when not in use. The closure can be customized with a logo upon request.

Code	For poles of Ø mm	Description	←→ mm			
			A	B	C	D
46.815.00	38	Recess-fit bushing, straight	95	141.5	56	74
46.815.01	38	Recess-fit bushing, inclined at 6°	95	141.5	56	74
46.815.90	38	Mounting counterflange for recess-fit bushing	95	-	-	74
46.820.00	50	Recess-fit bushing, straight	108	150	70	90
46.820.01	50	Recess-fit bushing, inclined at 6°	108	150	70	90

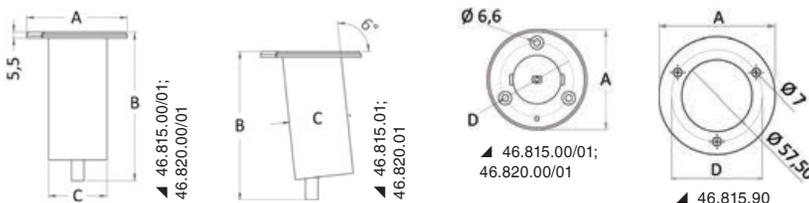


OSCULATI




Recessed bushing for carbon pole with hinge cover

Made of stainless steel with locking hasp and staple, locking seal and mounting counterflange - 46.814.90. Water drainage setup for a Ø 12 mm pipe, including mounting counterflange (code 46.814.90). The closure discreetly protects the glass when not in use. It is possible to customize the cap with a logo upon request.

Code	For poles of Ø mm	Description	←→ mm			
			A	B	C	D
46.814.00	38	Recess-fit bushing, straight	95	141.5	56	74
46.814.01	38	6° angled recessed bushing	95	141.5	56	74
46.814.90	38	Extra mounting counterflange	100	-	-	-

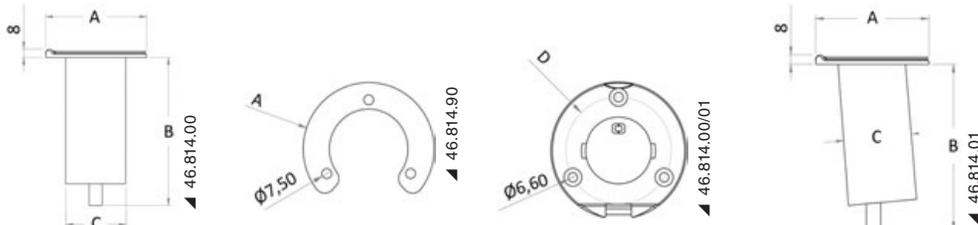

OSCULATI

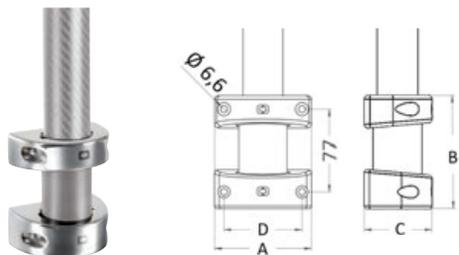


Wall bushing for carbon pole Ø 38 mm

Composed of a double bracket, lower and upper, wall-mounted for awning pole. The pole rotates 90° within the bracket and remains locked. High aesthetic finish system thanks to the mirror-polished surface and front logo. Bulkhead mounting by means of two x M6x40 countersunk screws or longer ones. Blind lower support. Thru-hull upper support.

Code	For poles of Ø mm	Description	←→ mm			
			A	B	C	D
46.815.10	38	Bulkhead bushing kit	92	106	65	74

OSCULATI

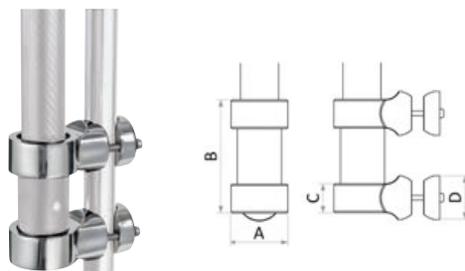

Bush for fixing on tubes for carbon pole Ø 38 mm

Double bracket to be applied to the mast base for pole attachment. The bushings are made of stainless steel and are secured to the candlestick with a counterflange and two M6 screws. Lower blind support, while the upper one is pass-through.

Code	For poles of Ø mm	Description	←→ mm			
			A	B	C	D
46.815.12	38	Candlestick Bushing Kit	62	115	31	48

Black line — 48.720.04

Giant Heavy Duty table pedestal

Tri-telescopic | Gas spring | Black fastening collars
Wide and stable base | No need to bore the floor



Table pedestals and legs


OSCULATI



Giant Heavy Duty black table pedestal

Made of black anodized aluminium with black plastic fastening collars for a total black effect. Fitted with gas spring for upstroke, no need to bore the floor for downstroke. Tri-telescopic.

Code	Height mm	Tube Ø mm	Extra-flat base Ø mm	Table plate mm	OPTIONAL extension kit
48.720.04	345/714	100/88/72	305	305x305	48.724.01; 48.724.02

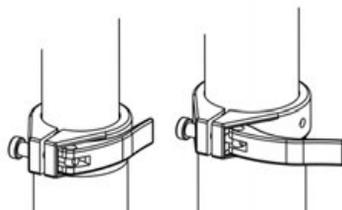

Glass and can holders



Anti-vibrating glass holder

Made of **black rubber**, for holding cans or glasses.

Code	Recess Ø mm	External Ø mm	Depth mm
48.430.10	75	100	55



Recess fit glass holder

ABS.

Code	Recess Ø mm	External Ø mm	Depth mm
48.430.12	75	86	75

OSCULATI



Glass and can holder

AISI 316

Made from stamped and polished **stainless steel**, it is fitted into the dashboard or control console.


Code	Colour	Inside Ø mm	External Ø mm	Depth mm	Recess Ø mm
48.430.80	Black	68	88	42	70

Deluxe stainless steel glass holder

AISI 316

Made from **stainless steel**. Double diameter for holding bottles and new cans; drainage hole with optionally connectable hose fitting; soft PVC on the bottom; mirror-polished edge. Supplied with a self-adhesive seal, eliminating the need for silencing and speeding up assembly.

Code	Version	Colour
48.430.81	Standard	Black



Telescopic and folding ladders

Total Black telescopic ladders for platforms black colour

AISI 316

Ladders are coated in black through a modern industrial process guaranteed for 500h in saline fog conditions.

Code	Steps	Tube Ø mm	Length mm		Max width mm
			open	closed	
49.536.03	3	19/25/32	889	370	300
49.536.04	4	19/25/32/38	1.156	394	315



OSCULATI

Emergency ladders


Emergency ladder in compliance with ISO 15085 standards

Ladder to be used to climb back onboard in case of emergency. Easy and fast installation to the stern pulpit.

Technical data:

- Made of polyester tape, fiberglass inserts to reinforce the steps.
- FLUO stripe on the steps for better visibility at night.
- Case with retro-reflective stripe.
- Install the ladder to the pulpit by means of 2 black satin-finish stainless steel buckles + 2 TENAX spring buttons.
- PVC case.

Code	Covering		ladder mm		Steps
	mm	Colour	length when open	Width	
49.522.31	280x254x60	Black	3300	250	11

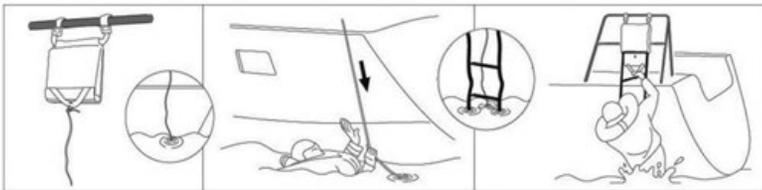

OSCULATI

Sinks and accessories

Hemispheric ceramic sink, for surface mounting

Black	Ø mm	Height mm
50.188.88	365	140

50.186.97 Chromed brass drain. 75-mm long with push-pull closure and 1" ¼ thread. Also used to fix the sink onto the flat rest surface.



50.186.97
Optional



ISOTHERM fridges



ISOTHERM Cruise Classic Total Black refrigerators

CRUISE Classic Total Black series features stylish and sturdy refrigerators, perfect for the marine environment. Available in capacities from 42 to 226 litres, they combine modern design in matt black and high energy performance.

- Integrated freezer (Drink version excluded).
- LED internal lighting.
- Refrigerator inner panels with rounded corners for easy cleaning.
- Secop energy-efficient 12/24 V compressor
- Door with magnetic lock.
- Corrosion-resistant materials.

Code	Model	Capacity l	V	Consumption W/24h	Compartment	←→ mm			kg
						L	P	H	
50.870.01	CR42 Total black	42	12/24	300	Single	380	455	525	14
50.870.02	CR49 Total black	49	12/24	278	Single	380	452	525	17
50.870.03	CR65 Total black	65	12/24	288	Single	450	473	530	18
50.870.04	CR85 Total black	85	12/24	386	Single	475	505	627	22
50.870.05	CR86 Total black	86	12/24	499	Single	380	495	850	22
50.870.06	CR100 Total black	100	12/24	400	Single	486	455	746	23
50.870.07	CR130 Total black	130	12/24	438	Single	525	510	750	27
50.870.08	CR130 Drink Total black	130	12/24	400	Single	527	520	750	27
50.870.09	CR226 Total black	226	12/24	648	Double	595	522	1452	52



ISOTHERM drawer refrigerator

Fitted with stainless steel rails and black or silver painted stainless steel door. Elegance line and user-friendly digital display.
 Silent and high-efficiency BD 12/24V 1.4F Secop compressor.
 Easy Fix system.



▲ 50.826.15

Code	Model	Capacity l	V	Current draw W / 24 hours	←→ mm	Colour	OPTIONAL frame for external mounting
50.826.15	DR30	30	12/24	270	260x440x700	Black	50.826.25



▲ 50.826.25

DOMETIC refrigerators



DOMETIC refrigerator

Innovative design and high energetic efficiency for a 3-in-1 cooling solution: refrigerator only, freezer only, or both. The freezer compartment can be easily pulled out to make room for a larger refrigeration.

- Touch control panel with integrated LED light bar;
- Reversible door hinge;
- Full-width door handle neatly integrated for easy access;
- Smart closing mechanism to create a gap between the fridge and the door to airing out;
- Energy-efficient, light, compact compressor with 3 operating modes (Eco/Boost/Silent);
- Compressor can be remote-controlled in the 35-litre version to reduce depth to minimum;
- Standard or flush-mount installation frame.

Dark silver door	Stainless steel panel	Model	Capacity l	V	Average current draw W	mm (LxHxP)	kg
50.914.01	50.915.01	NRX0035	34	12/24	0.2296	380x525x480/355	16
50.914.03	50.915.03	NRX0050	46	12/24	0.2222	380x525x510	17
50.914.05	50.915.05	NRX0060	58	12/24	0.2335	448x525x537	17
50.914.07	50.915.07	NRX0080	78	12/24	0.3036	475x625x537	20
50.914.09	50.915.09	NRX0115	116	12/24	0.3671	525x745x568	25
50.914.11	50.915.11	NRX0130	130	12/24	0.3729	525x812x568	26



50.914.xx



50.915.xx



50.914.xx



50.915.xx



DOMETIC drawer refrigerators

Innovative design and high energetic efficiency for a 3-in-1 cooling solution: refrigerator only, freezer only, or both. The freezer compartment can be easily pulled out to make room for a larger refrigeration.

- Touch control panel with integrated LED light bar;
- Reversible door hinge;
- Full-width door handle neatly integrated for easy access;
- Smart closing mechanism to create a gap between the fridge and the door to airing out;
- Energy-efficient, light, compact compressor with 3 operating modes (Eco/Boost/Silent);
- Compressor can be remote-controlled in the 35-litre version to reduce depth to minimum;
- Standard or flush-mount installation frame.

Dark silver door	Stainless steel panel	Model	Capacity l	V	Consumption W/24 h	mm (LxHxP)	kg
50.916.03	50.917.03	NRX0050	46	12/24	222	380x510x525	17
50.916.05	50.917.05	NRX0060	58	12/24	234	448x537x525	17



50.917.03/05



50.916.03/05

DOMETIC refrigerators, deep black

Refrigerators with dark black panel. Equipped with 3 convenient shelves and a small compartment for bottles or cans. Freezer compartment can be ordered separately as an accessory.

- Touch control panel with integrated LED light bar;
- Reversible door hinge;
- Full-width door handle neatly integrated for easy access;
- Energy-efficient, light, compact compressor with 3 operating modes (Eco/Boost/Silent);
- Compressor can be remote-controlled in the 35-litre version to reduce depth to minimum;
- Standard or flush-mount installation frame.

Dark black door	Model	Capacity l	V	Consumption W/24 h	mm (LxHxP)	kg
50.918.01	NRX0035E	34	12/24	230	380x525x480/355	16
50.918.03	NRX0050E	46	12/24	222	380x525x510	17
50.918.05	NRX0060E	58	12/24	234	448x525x537	17
50.918.07	NRX0080E	78	12/24	304	475x625x537	20



50.918.01-07

TECMA electric toilet bowls




Tecma products feature ultra quiet operation, reliable systems, low consumption in terms of power and water (0.5 to 2.7 litres per cycle), fast installation and high-quality components. The product range comes in different lines and formats to suit all needs still offering the same technology and respecting the installations design restrictions.

TECMA Silence Plus 2G Black Edition Electric Toilet

Total Black versin of the WC Silence Plus 2G (Generation2) complete with **black** Touch SFT control panel.



Code	Model	V	←→ mm			Built-in bidet	Installation	kg
			Height	Width	depth			
50.227.47	Silence Plus 2G	12	460	390	510	no	Above floor	25.5
50.227.41	Silence Plus 2G	24	460	390	510	no	Above floor	25.5
50.227.46	Silence Plus 2G+Bidet	24	460	390	510	Yes	Above floor	25.5

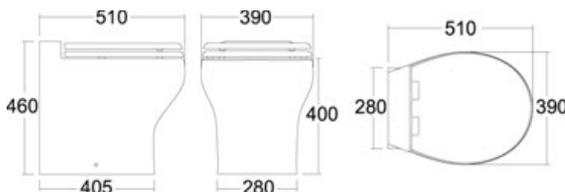

Accessories for inflatables

EPDM handle for dinghies

Made of EPDM, for dinghies.



Black	Type	Material	←→ base mm
66.070.31	Handle	EPDM	230x100
66.070.29	Handle	EPDM	300x120

New Style EPDM accessories for dinghies



Code	Type	Material	←→ mm	
			Base	bore Ø
66.070.43	Fairlead	EPDM	96x96	18
66.070.45	Bimini top holder	EPDM	Ø 100	11.5
66.645.00	Basis for bimini tops or flag holder	EPDM	Ø 77 x 40	10 Expandable

EPDM carrying handle



Code	Type	Material	Colour	←→ mm	
				Base	Height
66.676.00	Straight handle	EPDM	Black	250x110	48

EPDM oar holder



Code	Colour	Material	←→ Ø base mm
66.005.00	Black	EPDM	110

Stainless steel D rings with EPDM support



Code	Colour	Material	←→ Ø mm
66.006.00	Black	EPDM + SS	100

Valves and air pressure gauges for inflatable boats

VA NX inflating valve

EASY MAINTENANCE


VA NX is smaller than other valves currently available on the market. Its main feature is that the valve body can be replaced without removing the external part glued to the inflatable (only the internal valve is replaced).

Code	Colour	Fabric thickness	A mm	B mm	Bore Ø mm	Nominal flow rate L/m
66.446.36	Black	0.5 - 3.5	69	42	43	2000
66.446.38	- Valve body only	-	-	-	-	-

66.446.46 *Spanner kit including: universal spanner 66.446.45 + specific spanner for VA NX valve tightening*



OSCULATI

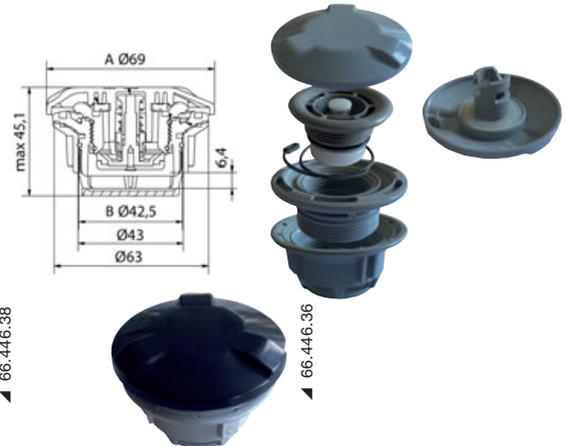


Mushroom vents, hatch vents and louvred vents

ABS Hose vent with collar

Made of ABS plastic.

Code	←→ mm					Type	Colour	For hose of items
	A	B	C	Ø Neck D	H			
53.273.02	92	92	62	76	-	straight	Black	16.104.35
53.273.04	126	126	76	102	-	straight	Black	16.104.36
53.274.02	92	92	108	76	32	90°	Black	16.104.35

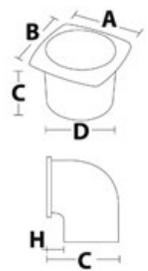

ABS Louvred vents

Made of ABS plastic.

Code	←→ mm	Colour
53.273.26	85x85	Black
53.480.82	125x125	Black



Nylon louver

Made of nylon.

Code	←→ mm	Colour
53.301.05	125x260	Black



ABS louver

Made of ABS plastic.


Code	←→ mm	Colour
53.273.90	201x101	Black



"Zebra" Louvred vents

Made of ABS plastic.

Code	←→ mm	Recess mm	Colour
53.458.01	435x64	405x48	Black

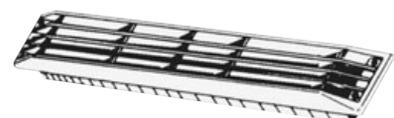

MASTER CATALOGUE 2025



**Explore
our complete
selection
of products!**

OUR SALES NETWORK

HEAD OFFICE

OSCOLATI S.r.l.

Via Pacinotti, 12 - 20054 Segrate (Milano) - Italy
Phone: +39 02 2699 111
sales@osculati.it
www.osculati.com

FRANCE

BARBARA BIANCHI

Départements 06 - 83 et Principauté de Monaco
Mobile: +39 366 758 2366
barbara.bianchi@osculati.com

EMMANUEL FOURNIER

Grand Est, Bourgogne Franche-Comté, Auvergne Rhône-Alpes,
Occitanie, PACA (sauf 06 & 83) et Corse
Mobile: +33 (0)660 700 303
emmanuel.fournier@osculati.com

CHRISTOPHE BRUNET

Départements Côte Atlantique
Mobile: +33 (0)689 904 585
christophe.brunet@osculati.com

YVES LE HÉRAN-VARANGOT

Bretagne, Normandie, Paris (Île de France),
Centre-Val de Loire, Hauts-de-France et Belgique (Sud E40)
Luxembourg
Phone: +33 (0)2 9958 5564
Mobile: +33 (0)6 6066 6138
yves.leheran@osculati.com

SWITZERLAND, CZECH REPUBLIC, HUNGARY, SLOVAKIA, AUSTRIA, MALTA, CYPRUS

CHIARA PAGNONI

Mobile: +39 347 4466003
chiara.pagnoni@osculati.com

GERMANY

CLAUS JETSCHIN

Phone: +49 (0)89 4423 7182
claus.jetschin@osculati.com

POLAND, ESTONIA, LATVIA, LITHUANIA, ROMANIA, BULGARIA, UKRAINE, RUSSIA

GIOVANNA GUSMEROLI

Mobile: +49 (0)176 2366 8170
giovanna.gusmeroli@osculati.com

UNITED KINGDOM, FINLAND, IRELAND, NORTHERN IRELAND, SOUTH AFRICA

IAN STEVENSON

Mobile: +44 (0)7720 419061
ian.stevenson@osculati.com

SWEDEN, NORWAY

SIMEN FLAK FEKJÆR

Mobile: +47 40 63 82 99
simen.fekjaer@osculati.com

THE NETHERLANDS, BELGIUM north of E40, DENMARK

HARMANNUS TIMMER

Phone: +31 (0)85 0043941
Mobile: +31 (0)62 1261404
harmannus.timmer@osculati.com

SLOVENIA, CROATIA, BOSNIA AND HERZEGOVINA, SERBIA, MONTENEGRO, NORTH MACEDONIA

UNIMAR S.r.l.

Via J.Ressel, 2/7 - 34018 San Dorligo della Valle (TS) - Italy
Phone: +39 040 661691 - info@unimar.org - www.unimar.org

UNIMAR RIJEKA d.o.o.

Preluk 6a - 51000 RIJEKA - HRVATSKA - Croazia
Phone: +385 (0)51 512680 - unimar@unimar.hr - www.unimar.hr

SPAIN, PORTUGAL, SOUTH AMERICA

ROSA LUCARELLI

Phone: +39 342 9595684
rosa.lucarelli@osculati.com



www.OSCULATI.com

**We are in 100 countries worldwide,
contact us for your nearest distributor.**